



DATI TECNICI SPECIFICATIONS

MODELLO
MODEL

M 90 RNS
M 90 RNS

PESO
WEIGHT

3,80 kg
8,37 lbs

DIMENSIONI (mm Larg. x Alt. x Lung.)
DIMENSIONS (inches W x H x L)

170 - 364 - 524
6 11/16 - 14 5/16 - 20 5/8

PRESSIONE (min - max)
PRESSURE (min - max)

5 - 8 bar
5 - 8 bar

CONSUMO ARIA (a 6 bar)
AIR CONSUMPTION (at 6 bar)

3,5 NL/Colpo
3,5 NL/Shot

ATTUAZIONE
OPERATION

Colpo a martello
Contact trip service

ALTRI MODELLI DISPONIBILI
OTHER MODELS AVAILBLE

M55 RNS/90-17°
M55 RNS/90-17°


CARATTERISTICHE FEATURES

Peso e bilanciamento ottimali, molto robusta per applicazioni industriali e nella costruzione, il naso profilato aumenta la visibilità sul posto di lavoro, elevata potenza per superare anche i nodi del legno, scarico flusso aria orientabile a 360°, attuazione colpo singolo su richiesta. *Perfect balance and light weight, ruggedly built for industrial applications and for building construction, profiled nose - high visibility on worksite, diving depth register for accurate job, exhausted air flow at 360°, high power to overcome knots, single shot service on request.*


APPLICAZIONI APPLICATIONS

Edilizia, costruzione, copertura tetti, sottopavimentazioni, rivestimenti, carpenteria in legno, travature, costruzione di casse, gabbie, pedane, pallets, imballaggio industriale in legno, coperture, rivestimenti da esterno, recinzioni. *Framing, construction, beams - wood carpentry, fencing - exterior decks, roof decking, sub-flooring, sheathing, cases, crates and pallets, industrial wood packaging.*

RNS-20°

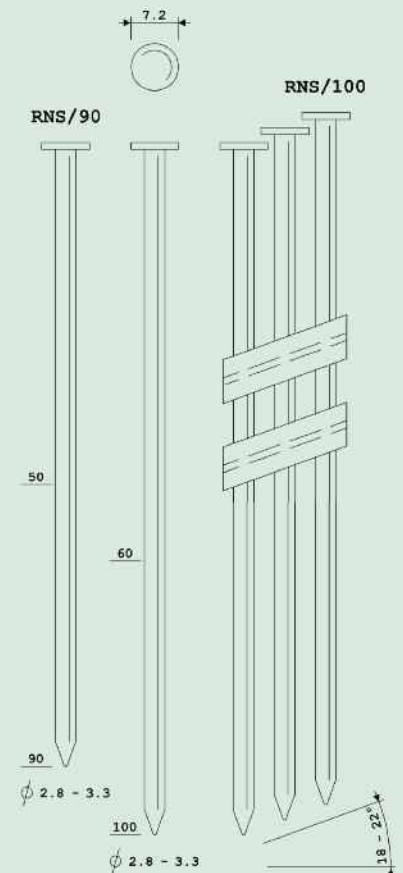

RNS-17°



LUNGHEZZA

Min - Max
50- 90 mm
LENGTH
Min - Max
2 - 3 9/16 inches

DIAMETRO FILO

da 2.8 - a 3.3 mm
WIRE DIAMETER
0.11 - 0.13 inches

DIAMETRO TESTA

da 6.5 - a 7.2 mm
HEAD DIAMETER
1/4 - 5/16 inches

CAPACITA' MAGAZZINO

65 chiodi
MAGAZINE CAPACITY
65 nails